

Hesco Barrier

The New Alternative

Advantages

- Pre-Assembled In Factory
- Quicker Assembly
- Low Cost
- Environment Friendly
- Durable&Long Lasting
- Strong&Flexible
- Low Maintenance&





SHENYU ANDESEN WIRE FENCING CO., LTD.
 : +86-15830100677
 www.adansenfence.com
 info@adansenfence.com

Technical overview


A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

Technical Data

Type No.	Height	Width	Length	Wire Diameter	Spring Diameter	Geo Textile Weight (kg)
1	4'6" (1.37m)	3'6" (1.06m)	32'9" (10.00m)	4-5mm	3-5mm	250g/m ²
2	2' (0.61m)	2' (0.61m)	4' (1.22m)			
3	3'3" (1.00m)	3'3" (1.00m)	32'9" (10.00m)			
4	3'3" (1.00m)	5' (1.52m)	32'9" (10.00m)			
5	2' (0.61m)	2' (0.61m)	10' (3.05m)			
6	5'6" (1.68m)	2' (0.61m)	10' (3.05m)			
7	7'3" (2.21m)	7' (2.13m)	91' (27.74m)			
8	4'6" (1.37m)	4' (1.22m)	32'9" (10.00m)			
9	3'3" (1.00m)	2'6" (0.76m)	30' (9.14m)			
10	7'3" (2.21m)	5' (1.52m)	100' (30.50m)			
11	4' (1.22m)	12' (3.66m)	4' (1.22m)			
12	7' (2.13m)	3'6" (1.06m)	108' (33m)			

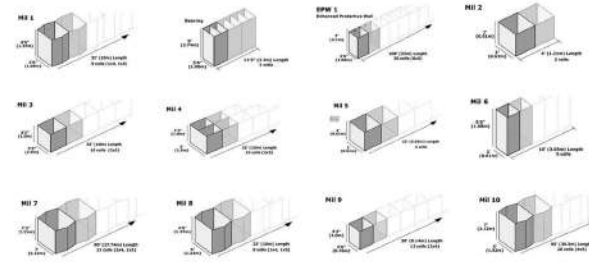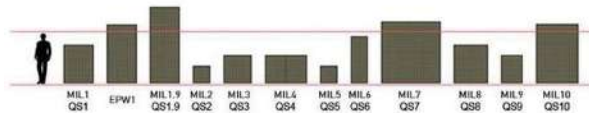

Material&Advantage



Galvanized before welding


Material: Hot-dipped Galvanized, Heavy Galvanized Wire, Al-Zinc Coated Wire

- Hot dipped galvanized normal zinc coating (40-60g/m²)
- Hot dipped galvanized heavy zinc coating (200-280g/m²)
- Galvan 5% Al zinc coating (200-500g/m²)
- Galvan 10% Al zinc coating (200-500g/m²)

Galvanized after welding

Electro/Hot-dipped Galvanized After Welding

Hot-dip galvanizing is the process of dipping fabricated steel in a bath of molten zinc to form a tightly-bonded alloy coating that provides superior corrosion protection to steel.



Non-Woven Geotextile Fabric

Weight: 200g/m², 250g/m², 300g/m² etc

Color: Olive Green, Sand Yellow, White, Black Etc.

UV Protection

Geotextile colors (customized is available)

